

15/30Jwin-F1

GAS SENSOR/TRANSMITTER

Safe Area Detector Head / offering local control and display

Specification Sheet C1805Av.3
Doc No. 296 D6C

- Robust and weatherproof
- CANbus, 4~20mA output
- Addressable or stand alone
- Data logging
- Adjustments – non intrusive magnets/manual/hyperterminal
- Back lit alpha numeric full status display
- Optional 3 selectable alarm relays
- Optional sounder/relay
- Optional pumped aspirated sensor



The 15/30J enclosure has been designed to allow quick and easy access to its interior by adjustment of two allen screws, this factor is a major consideration when large system service and calibrations are being carried out.

The detector is robust and weather-proof with improved response times due to the four mounting spacers allowing increased air movement around the detector these spacers also improve the mounting of the unit particularly on circular pillars typically found in car parks. Standard 4~20mA signalling with CANbus address enables the sensors to be networked via the GDS Combi control system or customer preferred monitoring system.

Power Supply

15 to 30vDC 24v nominal

Outputs

3 wire – 4~20mA

4 wire – CANbus

Relays (optional) 1, 2, 3

Selectable: Low, High, Overrange, Fault

Default settings:

1 – Low alarm

2 – High alarm

3 – Fault alarm

Rating 3A @30vDC S.P.C.O

Inhibit option during servicing

Sounder/Relay (optional)

Single relay – Low / High alarm selectable

Sounder – not less than 85dB @30cm S.P.C.O

Indicators

Alarm – Red L.E.D

Fault/Inhibit – Amber L.E.D

Display

2 line alpha numeric back lit status display:

– gas type

– concentration units

– alarm levels

– alarm status (low/high/over range/fault)

– sensor ID

Logging

Intervals – variable time

Roll over/stop

Storage – 2,880 readings

Temperature

-15 °C to 55 °C

Humidity

Pellistor-catalytic

0 - 99% RH non condensing

Electrochemical

5 - 95% RH non condensing

Infrared

0 - 95% RH non condensing

DETECTOR HEAD

Type – F1 Hazardous area use

Data Sheet

Ref C105

Certification

ATEX / IECEx

Ingress Protection

IP63, + Universal fitting IP64

Material

Stainless Steel 316 S16

Weight

166gms

Dimensions

Length 32mm, Dia 33mm

Sensor Inserts - 4 series

Electrochemical

Infra-red

Semiconductor

Pellistor-catalytic

PID

Accessories - Optional

Collector Cone + Universal Fitting

Universal Fitting (test gas applicator/spray deflector)

Water Shield – stainless steel

Flow Block – nylatron

Flow Block – stainless steel

Duct Mount Kit

Detector Head Weather Shield

F1 Sensor Thermal Jacket

JUNCTION BOX

Type – 15/30J safe area use only

15J – shallow box (S)

30J – deep box (D)

Ingress Protection

IP64

Material

ABS Flame retardant FR40

Lid Screws M4SS

Finish

Signal White RAL 9003

Weight

380gms

Entries

Rear: 5-20mm knock outs

Bottom: 2x drill targets

Top and Sides: Not specified

Mounting

Standoffs – M4 or No 8 screws

Drill at (C) when standoffs removed

Conduit box – drill at (A) 4.5mm

Surface mount box – drill at (B) 4.5mm

EU Design No.

01359723-0001


TRANSMITTER TECHNICAL DATA

Documents

Flammable – C1883

Toxic/Oxygen – C1882

Prime – C1884

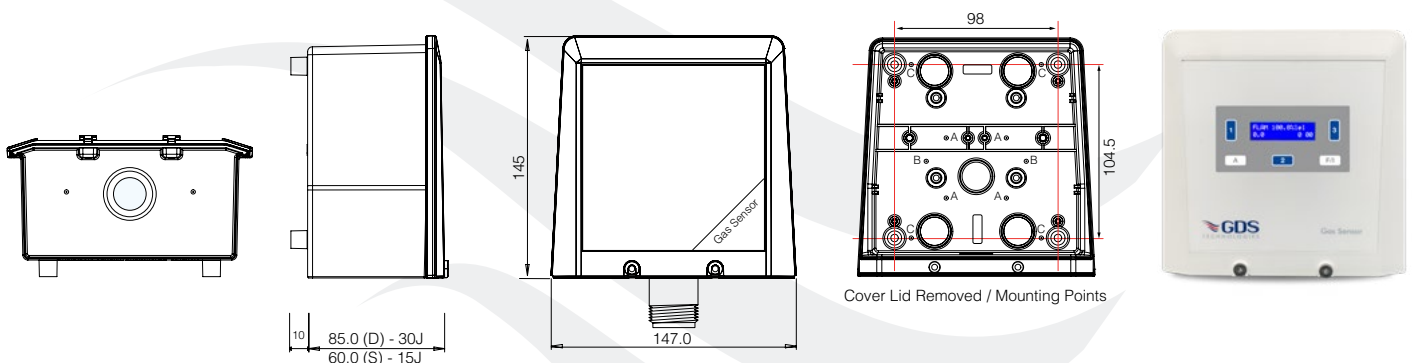

This document is not contractual and the specification/detail may be modified at any time without prior notice.

E: sales@gds-technologies.co.uk T: +44 (0)113 286 0166

GDS TECHNOLOGIES LTD | FUSION POINT | ASH LANE | GARFORTH | LEEDS | LS25 2GA | UK

www.gds-technologies.co.uk

