


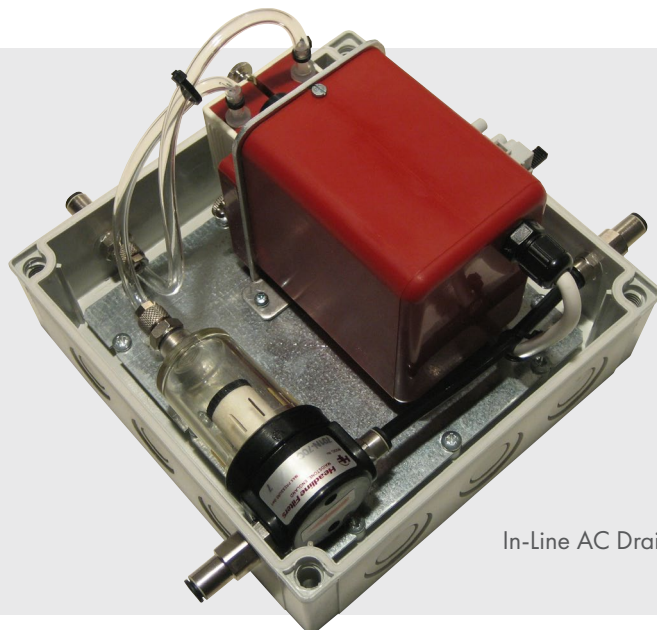

In-Line AC Drain

This in-line unit enables the discharge of condensate from sample lines for pressures below ambient conditions by means of a timed/continuous duty peristaltic pump.

Enclosure Size

Wall mount 180 x 180 x 150 H

Power Supply

230V AC 50/60hz 60mA – standard

115V AC 50/60hz 110mA – option

24V DC 100mA – option (10-0513)

Protection Class

IP66

Suction Volume

0.3 l/h

Vacuum

>320mbar

Pressure

>0.5bar

Pipe Connection

6mm OD 4mm ID push


For DC momentary use auto drain units,
the default time settings for operating are:

ON – 10 minutes

OFF – 50 minutes

For adjustment see G1451

AC Drain Pump

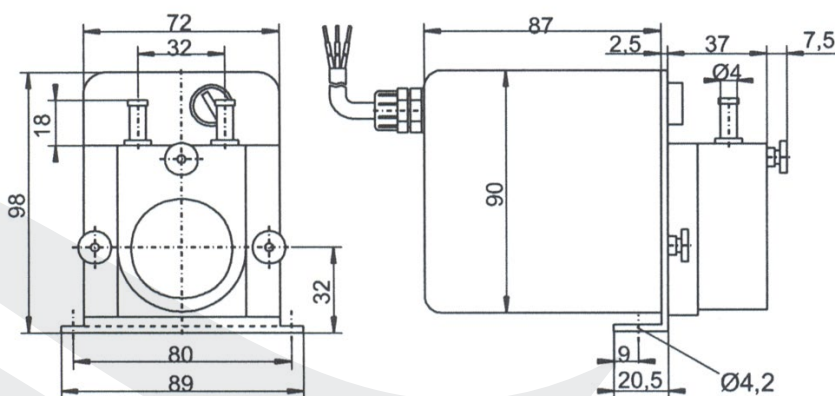

This document is not contractual and the specification / detail may be modified at any time without prior notice.

